
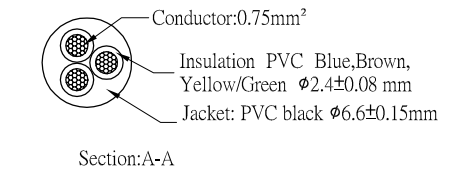
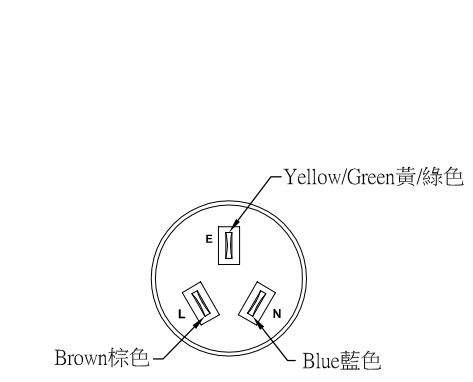





REV.	DESCRIPTION	DESIGN	APPROVAL	DATE
A	NEW	Hongmei	XL Deng	2018.01.20

Technical requirement 技术参数：
 1. Electrical Characteristics Test 电气性能检验
 1.1 Products 100% for electrical test 成品100%电性测试
 1.2 Insulation resistance: No less than 100MΩ of 500V DC /0.4s
 绝缘阻抗:大于或等于100MΩ 500V DC /0.4s
 1.3 Dielectric strength 耐电压
 1.3.1 Between two conductors 2500^{+200}_0 V AC for 1.0s Trip-current 1.0mA max
 导体与导体之间 2500^{+200}_0 V AC /1秒,漏电流1.0mA(max)
 1.3.2 Between conductor and body 2500^{+200}_0 V AC for 1.0s - Trip current 1.0mA max
 导体与本体之间 2500^{+200}_0 V AC /1秒,漏电流1.0mA(max)
 2. Mechanical Characteristics Test 机械性能检验
 2.1. Withdrawal force 拔出力
 2.1.1 For checking each PIN independently from the standard-gauge below 1.5N(Min) Keep for 3S or more
 标准量规对连接器插孔单PIN保持力为最小1.5N保持3秒以上
 2.1.2 For checking Integral withdrawal force 50N(Max) from maximum standard gauge. 标准量规(最大值)检查整体拔出力 50N(最大)
 3. Finished product conditions 成品状态
 3.1 The attachment plug front show the test mark of "T".
 插头主视面须有测试标志"T".
 3.2 The dimension with "▽" must be control and inspected importantly.
 带"▽"尺寸需重点管控和检验。
 3.3 The dimension with " * " is required by safety standard.
 带" * "尺寸为安规尺寸。
 3.4 material and product comply with Doc No."QW-Q-043" 《material-and product- of restricted substance control specification.
 物料及成品必须符合QW-Q-043 《材料与成品限用物质管理规范》
 4. Standards 标准
 4.1 The cord shall comply with GB5023.5 线材符合GB5023.5
 4.2 The molded plug shall comply with GB1002/GB2099 插头符合GB1002/GB2099
 4.3 The molded connector shall comply with GB17465 连接器符合GB17465.
 4.4 The cord set shall comply with GB15934 组件符合GB15934.

wiring method 接线方式：
 J1 cord J2
 E — Yellow/Green黄/绿色 — E
 L — Brown棕色 — L
 N — Blue 蓝色 — N

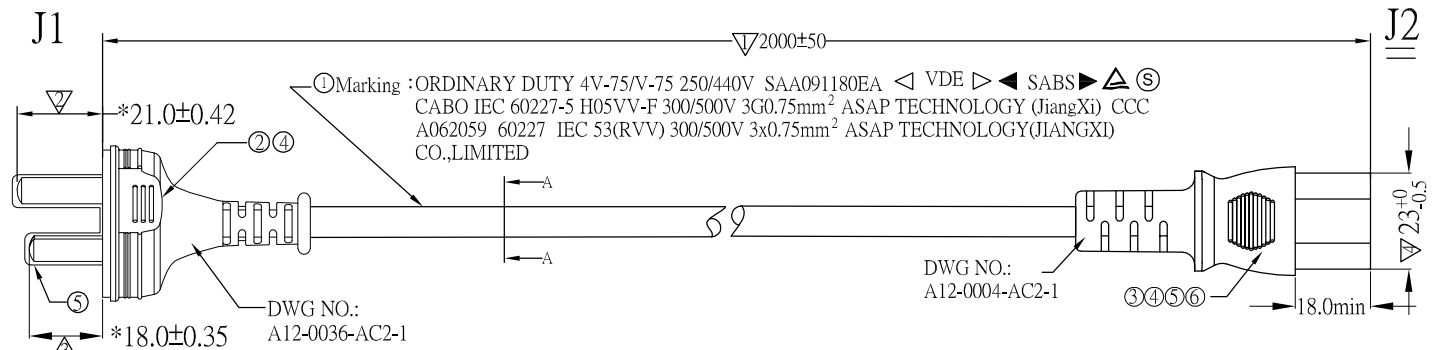

Details J1 see the DWG NO.A12-0036-AC2-1
 (J2端规格详见DWG NO.A12-0036-AC2-1产品图)

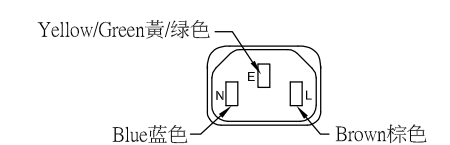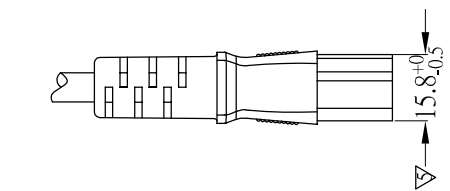

Marking details J2 see DWG NO.A12-0004-AC2-1
 (J2端标志详见DWG NO.A12-0004-AC2-1产品图)

ITEM	NAME	DESCRIPTION	UNIT	Q'TY
⑧	SLEEVE	Protecting sleeve for plug,Black.	PCS	1
⑦	TIE	BLACK PE tie hanking cord and meeting RoHS.	PCS	1
⑥	PLASITC	55P BLACK PVC pellets meeting RoHS and UL94 V-0.	KG	
⑤	TERMINAL	U type contact terminal with wing for C13 connector, copper	PCS	3
④	HOUSING	Down cover of C13 , PBT material, white	PCS	1
③	HOUSING	Upper cover of C13 , PBT material, white	PCS	1
②	INSERT	CCC insert with earthing,black nickel-plated copper	PCS	1
①	POWER CORD	60227 IEC 53RVV 3x0.75mm ² $\phi 6.6 \pm 0.15$ mm Black	MM	

X.±	X.°±	UNITS	TDI P/N:MC-1735
.X±	.X°±		
.XX±	.XX°±	MATL	PART NO: L9NAC006-QT-R
.XXX±	.XXX°±		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF Luxshare-ICT AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF Luxshare-ICT		FINISH	APPD: XL Deng
		Q'TY	CHKD: Guangren Ouyang
			DR: Hongmei Hu

Luxshare-ICT

TITLE:
Straight CCC 3P TO C13 L2.0m Black

DWG NO:
RDN17120289-006

SCALE	SHEET	REV.
NONE	1/1	A